

Figure 1: N13C5 Transducer

### Frequency Range

- 5-13 MHz

### Uses

- Neonatal cephalic imaging
- Interventional procedures

### Benefits

- Integrated one-touch Smart Select transducer activation and programmable mode select button
- Direct imaging contact for sharper images without sterile covers
- Extremely comfortable – like a natural extension of your hand
- Superb, detailed images for precise neurostructural imaging
- Easy acoustic access through the fontanelles of a neonatal heads

### Cleaning, Disinfecting and Sterilizing

N13C5 can be reprocessed using methods listed under *Specifications*.

- N13C5 can be supplied with an optional watertight plug lid that fits over the connector plug to protect it during reprocessing procedures (including washing) that involve liquids. When the lid is attached, the transducers can be fully immersed. The lid must not be attached when gas processing methods are used.

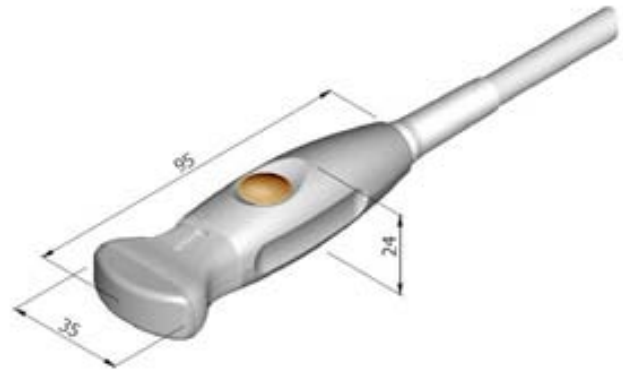


Figure 2: Dimensions (mm)