



Figure 1: 10L2w Transducer

Frequency Range

- 2-10 MHz

Uses

- Peripheral Vessel (Peripheral Vascular) imaging
- Elastography
- Smart Flow Imaging (SFI)

Benefits

- Integrated one-touch Smart Select transducer activation and programmable mode select button
- Midrange frequency gives good near-field images with high resolution and deep penetration with one transducer
- Wide image field
- Broad bandwidth
- Dynamic transducer focusing
- Dedicated needle guide
- Built-in control button gives complete control
- Compatible with modern reprocessing methods

Reprocessing

10L2w can be reprocessed using methods listed under *Specifications*.

- 10L2w is supplied with a watertight plug lid that fits over the connector plug to protect it during reprocessing procedures (including washing) that involve liquids. When the lid is attached, the transducers can be fully immersed. The lid must not be attached when gas processing methods are used.

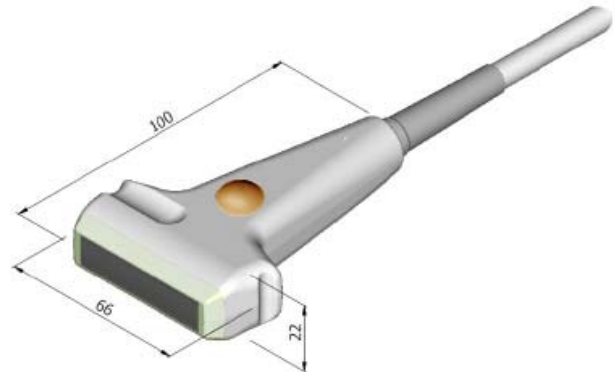


Figure 2: Dimensions (mm)